


Crystallizers

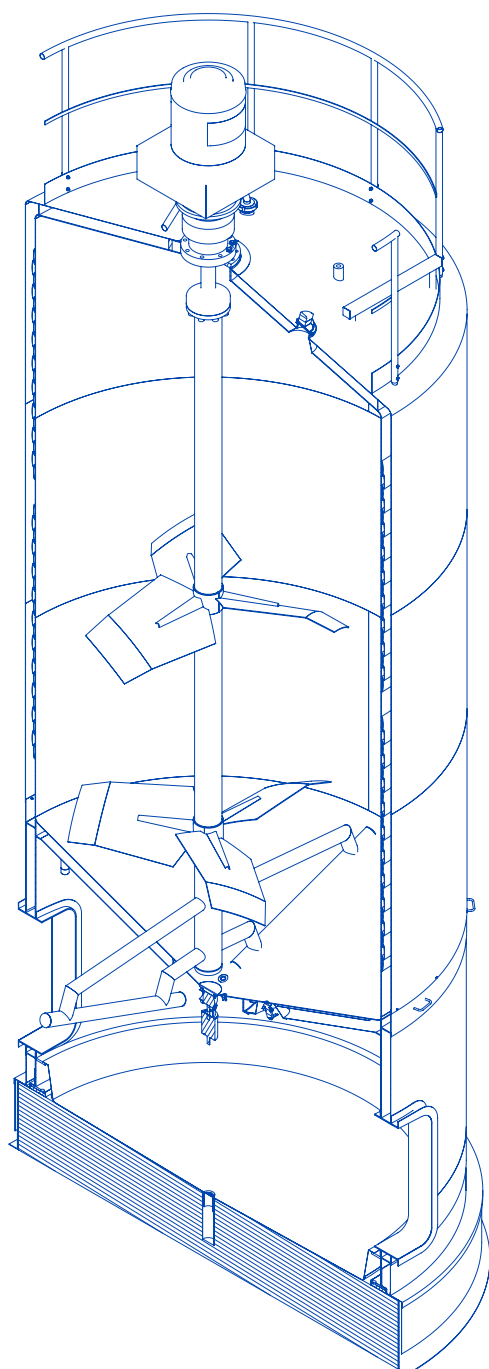

Operating conditions

-  atmospheric
-  blanketing and/or sterile

Capacity

-  up to 50.000 liters

Structure

-  conical bottom onto legs
-  conical/dished bottom on skirt

Temperature control

-  high-efficiency pressed wrinkled jacket
-  "french-type" channel

Agitation system

-  eccentric

Washing systems

-  rotating/static washing balls
-  lateral/bottom washing
-  washing turbines