


Special constructions

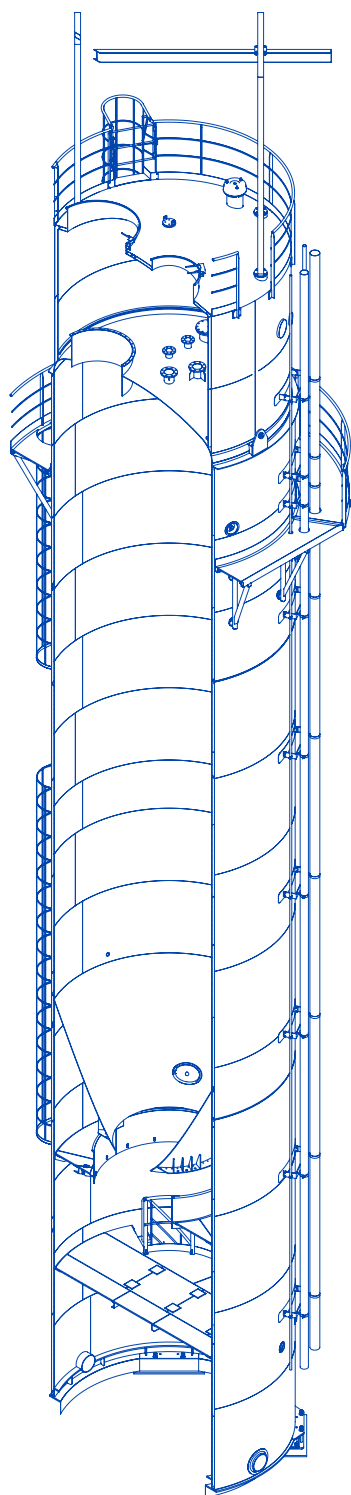

Operating conditions

 atmospheric

 at pressure

Capacity

 up to 300.000 liters

Structure

 conical bottom onto legs

 conical/dished bottom on skirt

Temperature control

 high-efficiency pressed wrinkled jacket

 "french-type" channel

 2"-3" half-pipe

 electrical tracing